


## Cube 01

---

---

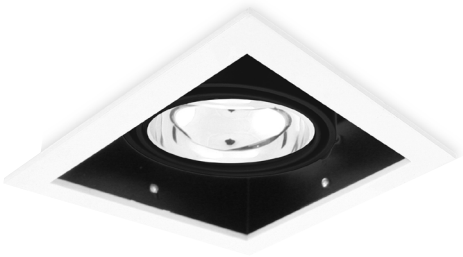

Resourceful, discreet multipurpose LED downlight. Recessed. Low-glare. Tilts 30° in all directions. For indoor use. For area, room, display, surface and task lighting. Easy installation in any ceiling. Xicato LED technology. Choice of CCT, lumen and beam angle combinations. Minimum 50% energy saving compared to equivalent halogen. Light quality ensured for entire lifetime. Rigorously tested. Rigorously documented. The light you specify is the light you get.

# Cube 01

For indoor use/dry locations  
 Recessed  
 Die-cast aluminium/steel  
 Tilts 30° in all directions  
 Position lock  
 Low-glare  
 Operating ambient temperature -20° to +40°  
 3,000 K or 4,000 K  
 Beam angle 20°, 40° or 60°  
 2, 3 and 4-head models also available  
 Trimless models also available  
 Non-dimming drivers included  
 Dimming drivers available  
 Xicato LED technology  
 CRI (Ra) 80 or 95  
 Five-year warranty  
 LED standard lifetime 50,000 hours  
 LED luminous flux 1000 or 2000 lm  
 Fixture luminous efficacy 40 to 50 lm/W

**1.2 kg**  
1000 lm

**1.1 kg**  
2000 lm



**IP 20**

**134x134mm**

**30°**

RoHS   

## Cube 01



						Item no.
White	20°	3,000 K	Ra 95	1000 lm	C0193010NW	
			Ra 80	2000 lm	C0183020NW	
	4,000 K	Ra 95	1000 lm	C0194010NW		
		Ra 80	2000 lm	C0184020NW		
	40°	3,000 K	Ra 95	1000 lm	C0193010MW	
		4,000 K	Ra 80	2000 lm	C0184020MW	
	60°	3,000 K	Ra 95	1000 lm	C0193010WW	
			Ra 80	2000 lm	C0183020WW	
4,000 K		Ra 95	1000 lm	C0194010WW		
		Ra 80	2000 lm	C0184020WW		

By special order: other combinations of beam angle + CCT + Ra + lumen