

Features & Benefits

- Sustainable and energy efficient (Cree) LED technology
- · Warm and powerful, functional light with a wide range of applications
- Low profile fixture that recesses 12mm into a 24.5mm diameter hole
- Suited for a wide range of applications
- · Easy to install, plug and play luminaire
- Clear, optical 45° lens for a well defined, crisp beam

Applications

- Ceilings
- Kitchen Cabinets
- Display Cases
- Book Cases and other furniture

PowerEYE HP 360 Fixed

The PowerEYE High Performance (HP) 360 series is a distinctly decorative, powerful ambient lighting solution.

Due to its low profile housing with a recess depth of only 12mm, the PowerEYE HP 360 is perfectly suitable for installation in ceilings, cabinets, display cases and many other applications. The standard plug-and-play wiring configuration makes it extremely easy to install.


The product is made of high-grade aluminium with a greyanodized finish. The 2700K warm white model delivers 90 lumens and is fitted with a 45° clear optical lens for a well defined, crisp beam.

The PowerEYE HP 360 is a state of the art quality product made in Europe at an affordable price.


Specifications

Lumen Output			
Warm White 2700K	90 lm		
Power Consumption	1,3W		
Efficacy	69 lm/W		
Rated Life	up to 50.000 Hours		
LED	Cree		
Color Temperature	2700K		
Beam Angle	45°		
Materials	Aluminium		
Fixture Color(s)	Grey-anodized		
Surface Temperature	Max. 45°C		
Operating Temperature	-10°C to +40°C		
Operating Current	350 mA		
Warranty	3 Years Limited		
Standards	C€ ₩/₩/ IP40 ŵ		
Environment	IP40, indoor application only		


Dimensions

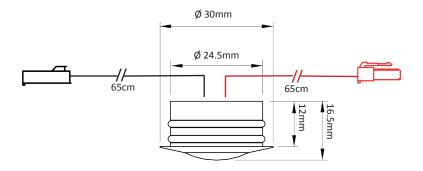



Example Connection Diagram

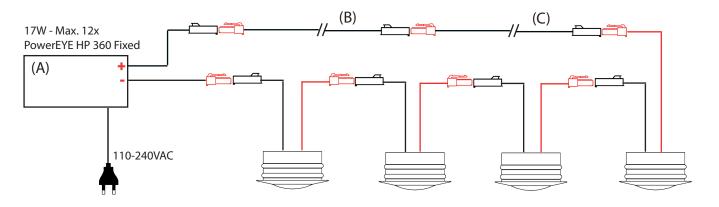

Installation









Ordering Information

Product	Desc	ription	Finish/LED Colour		Item Code
PowerEYE HP 360 Fixed 1.3W	Singl	e, Linkable LED Unit	Matte Aluminium/Warm White	LED 2700K	504.593.0U.42109
Accessory	#	Item Code	Accessory	#	Item Code
Driver 350mA 17W Max	(A)	324.025.0U.00002	Extension Cable 100cm Extension Cable 300cm	(B) (C)	324.024.0U.00102 324.024.0U.00202

©2012 All rights reserved.



